Fair-Rite Products Corp.
Your Signal Solution®

# EMI Suppression Beads (2673003201)

Part Number: 2673003201

73 SHIELD BEAD

Explanation of Part Numbers:
– Digits 1 & 2 = Product Class
– Digits 3 & 4 = Material Grade
– Last digit 1= Not Burnished 2 = Burnished
– The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002″).

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

**For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.**

Catalog Drawing
3D Model

The C dimension, the bead length, can be modified to suit specific applications.

Weight: 1 (g)

| Dim | mm | mm tol | nominal inch | inch misc. |
|---|---|---|---|---|
| A | 5.6 | -0.50 | 0.211 | _ |
| B | 2.65 | ±0.25 | 0.104 | _ |
| C | 12.7 | ±0.50 | 0.5 | _ |

**Chart Legend**
+ Test frequency
• The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see

figures 18-23 in the application note How to choose Ferrite Components for EMI Suppression.

| Typical Impedance (Ω) | |
|---|---|
| 1 MHz | 36 |
| 5 MHz | 82 |
| 10 MHz+ | 98 |
| 25 MHz+ | 84 |


| Electrical Properties | |
|---|---|
| H(Oe) | 1.1 |

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Catalog Drawing

Single turn impedance tests for 73 and 43 material beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

| Typical Impendance (Ω) | |
|---|---|
| 1 MHz | 23.5 |
| 5 MHz | 56.5 |
| 10 MHz+ | 60 |
| 25 MHz+ | 60 |

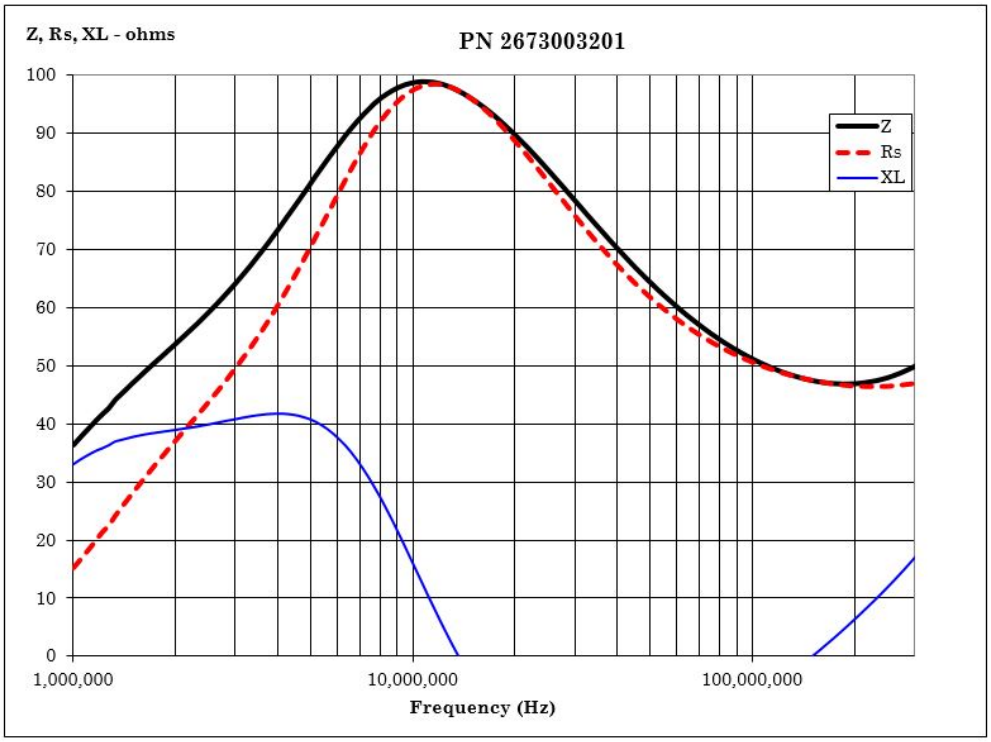


CSV Download