

Part Number: 2861002302 61 MULTI-APERTURE CORE Explanation of Part Numbers: - Digits 1 & 2 = Product Class - Digits 3 & 4 = Material Grade - Last digit 2 = Burnished **Multi-aperture cores are used in suppression applications and in balun (balance-unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.** All multi-aperture cores are supplied burnished. Our “Multi-Aperture Core Kit” (part number 0199000036) is available for prototype evaluation. **For any multi-aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.**

[Catalog Drawing](#)
[3D Model](#)

Weight: 0.1 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	3.45	±0.25	0.136	—
B	2.35	±0.25	0.093	—
C	2	±0.15	0.079	—
E	1.45	±0.10	0.057	—
H	0.75	+0.25	0.034	—

Chart Legend

+ Test frequency

Typical Impedance (Ω)	
100 MHz	41
250 MHz ⁺	56
Electrical Properties	
A _L (nH)	60 Min


Multi-aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and A_L value. The high frequency 67 material is controlled for A_L value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

[Catalog Drawing](#)

Multi-aperture cores in 73 and 43 material are measured for impedance on the E4990A Impedance

Analyzer. The 61 and 67 multi-aperture cores are tested on the E4991A / HP4291B Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

The 61 and 67 material multi-hole beads are tested for A_L value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

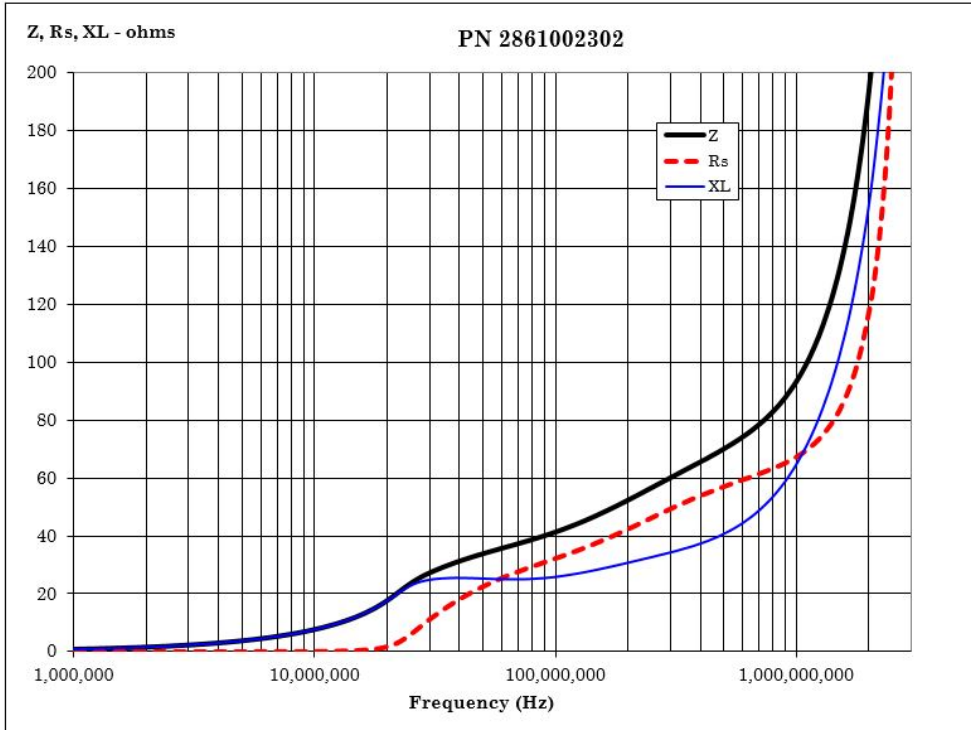

[CSV Download](#)

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com