Fair-Rite Products Corp.
Your Signal Solution®

EMI Suppression Beads (2661000101)

Part Number: 2661000101

61 SHIELD BEAD

Explanation of Part Numbers:
– Digits 1 & 2 = Product Class
– Digits 3 & 4 = Material Grade
– Last digit 1= Not Burnished 2 = Burnished
– The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002″).

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

Catalog Drawing
3D Model

The C dimension, the bead length, can be modified to suit specific applications.

Weight: 0.1 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	3.5	±0.20	0.138	_
B	1.3	±0.10	0.051	_
C	3.25	±0.25	0.128	_

Chart Legend
+ Test frequency
• The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see

figures 18-23 in the application note How to choose Ferrite Components for EMI Suppression.

Typical Impedance (Ω)	
100 MHz	35
250 MHz+	49
500 MHz+	65
1000 MHz	93


Electrical Properties	
H(Oe)	2

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Catalog Drawing

Single turn impedance tests for 73 and 43 material beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

Typical Impendance (Ω)	
100 MHz	30
250 MHz+	45
500 MHz+	62
1000 MHz	95

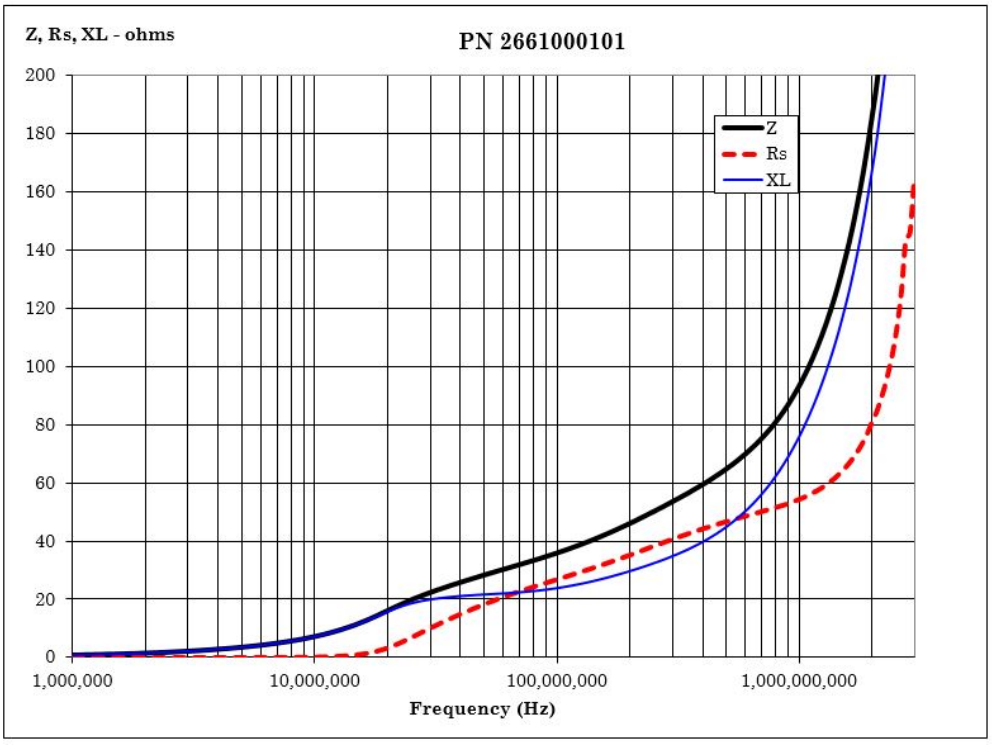

CSV Download