

Miscellaneous Suppression Cores

(2643165151)

Part Number: 2643165151

43 SPLIT ROUND CABLE CORE

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade

Fair-Rite has tooled several special core geometries in the 43 & 77 material for suppression of conducted EMI.

For any non-catalog suppression core design feel free to contact our customer service or application group for feasibility and availability.

[Catalog Drawing](#)

[3D Model](#)

The “C” dimension, the core length, can be modified to suit specific applications.

Weight: (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	82.6	_	3.252	
B	13.1	_	0.516	
C	28	_	1.102	
D	12.95	±0.25	0.51	_
E	19.05	±0.40	0.75	_
F	6.40	/>(0.252")	0.252	

Chart Legend

+ Test frequency

• Figures 3 & 4 tested in pairs

Typical Impedance (Ω)	
10 MHz	114


Typical Impedance (Ω)	
25 MHz ⁺	177
100 MHz ⁺	270
250 MHz	317

These suppression cores are controlled for impedance only. The minimum impedance is typically the listed impedance less 20%.

[Catalog Drawing](#)

Single turns tests are performed on the E4991A / HP4291B Impedance Analyzer with the shortest practical wire length.

Typical Impedance (Ω)	
10 MHz	100
25 MHz ⁺	163
100 MHz ⁺	280
250 MHz	340

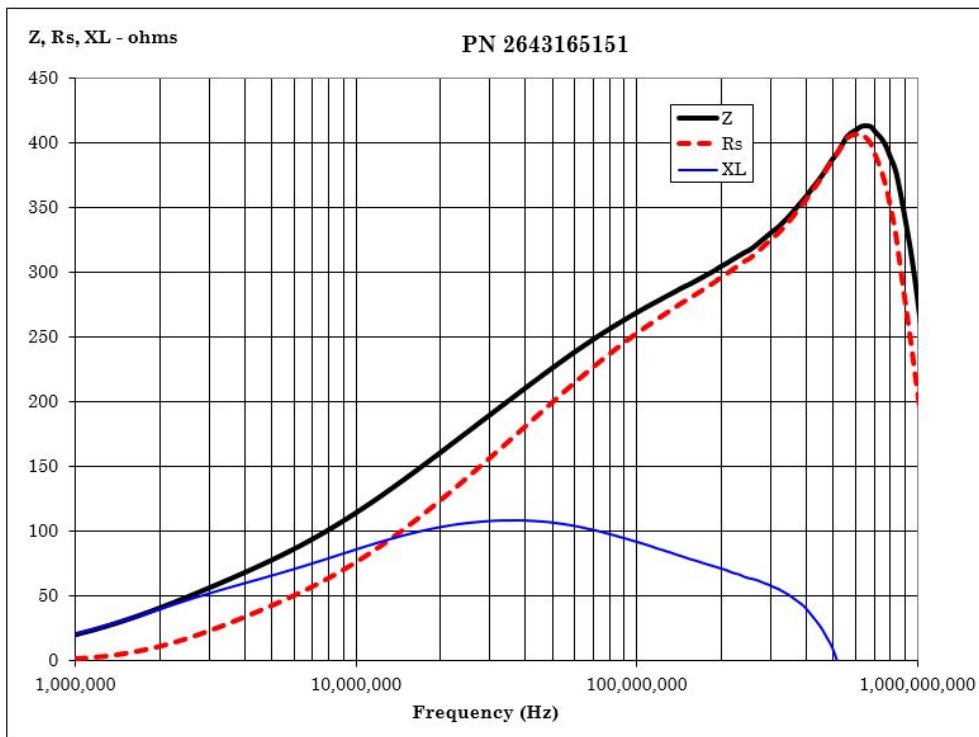

[CSV Download](#)