

Part Number: 0443163951

43 FLAT CABLE CORE ASSEMBLY

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade

Flat Cable Snap-Its for use on multi-conductor flat cables to suppress common-mode conducted EMI from 1MHz to hundreds of MHz. These Flat Cable Snap-Its are available in two ferrite materials, 31 and 43. The polypropylene cases are meeting the RoHS restrictions of hazardous substances and have a flammability rating of UL 94 V-0.

The Expanded Cable and Suppressor Kit (Part number 0199000005) contains several Flat Cable Snap-It assemblies.

[Catalog Drawing](#)

[3D Model](#)

Weight: 110 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	68.00	+/- 2.00	2.677	_
B	51.00	_	2.008	_
C	32.5	+/- 1.5	1.28	_
D	7.90	+/- 0.5	0.311	_

Cable Information			
Max Diameter	Max Dimension	Solid Equivalent	Flat Cable Cores
00	51.00 x 1.30	_	-



Chart Legend

+ Test frequency


Typical Impedance (Ω)	
10 MHz	50
25 MHz ⁺	84
100 MHz ⁺	178
250 MHz	300

Flat Cable Snap-It assemblies are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

[Catalog Drawing](#)

Centered, single turn impedance tests on the 31 and 43 material parts are performed on the E4991A/HP4291B Impedance Analyzer. Cores are tested with the shortest practical wire length.

Typical Impedance (Ω)	
10 MHz	56
25 MHz ⁺	100
100 MHz ⁺	290
250 MHz	400

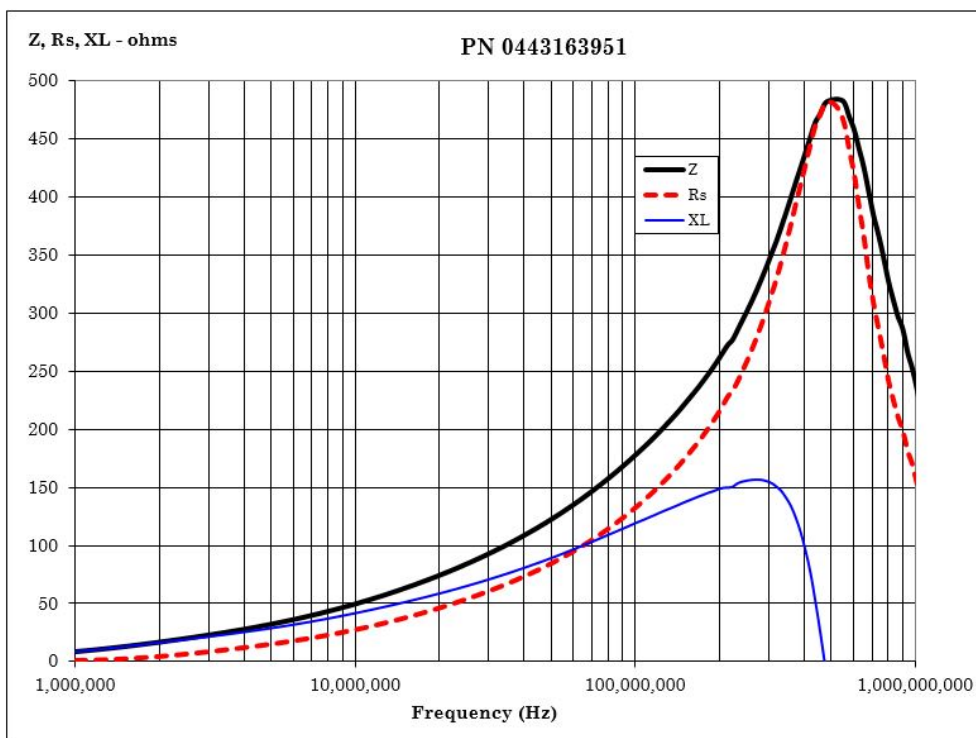

[CSV Download](#)

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
 888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com