

Miscellaneous Suppression Cores

(2677102402)

Part Number: 2677102402

77 ROUND CABLE CORE

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade

Fair-Rite has tooled several special core geometries in the 43 & 77 material for suppression of conducted EMI.

For any non-catalog suppression core design feel free to contact our customer service or application group for feasibility and availability.

[Catalog Drawing](#)

[3D Model](#)

The “C” dimension, the core length, can be modified to suit specific applications.

Weight: (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	25.9	_	1.02	
B	12.8	_	0.504	
C	21.3	_	0.839	

Chart Legend

- + Test frequency
- Figures 3 & 4 tested in pairs

Typical Impedance (Ω)	
1 MHz	63
10 MHz ⁺	29.5
25 MHz ⁺	23



These suppression cores are controlled for impedance only. The minimum impedance is typically the

listed impedance less 20%.

[Catalog Drawing](#)

Single turns tests are performed on the E49990A Impedance Analyzer with the shortest practical wire length.

Typical Impedance (Ω)	
1 MHz	52
10 MHz ⁺	25
25 MHz ⁺	23

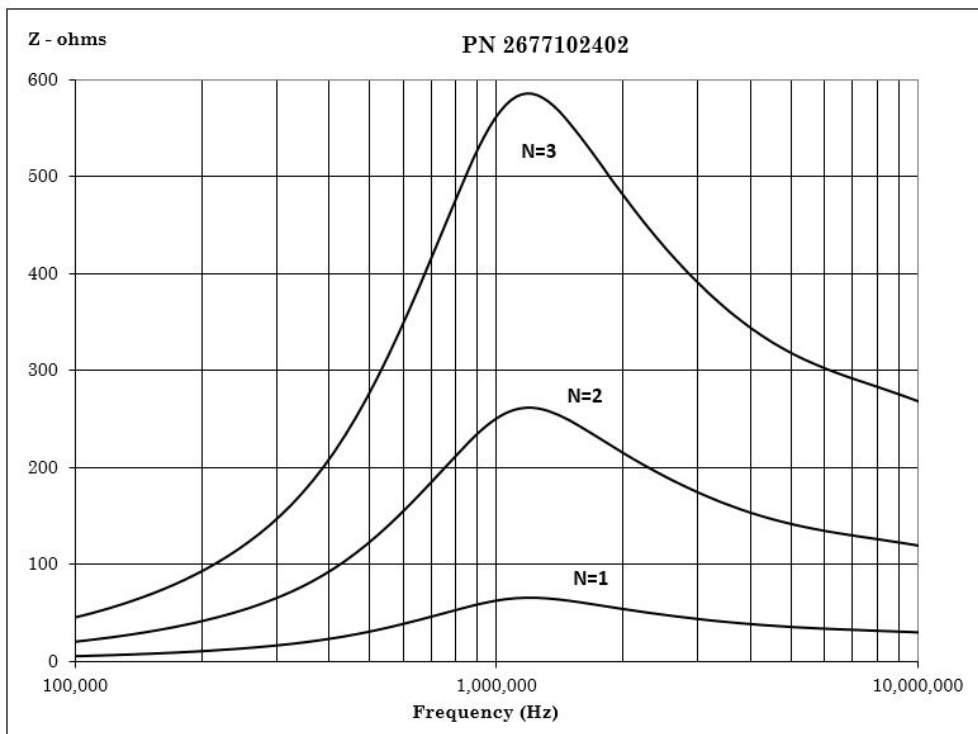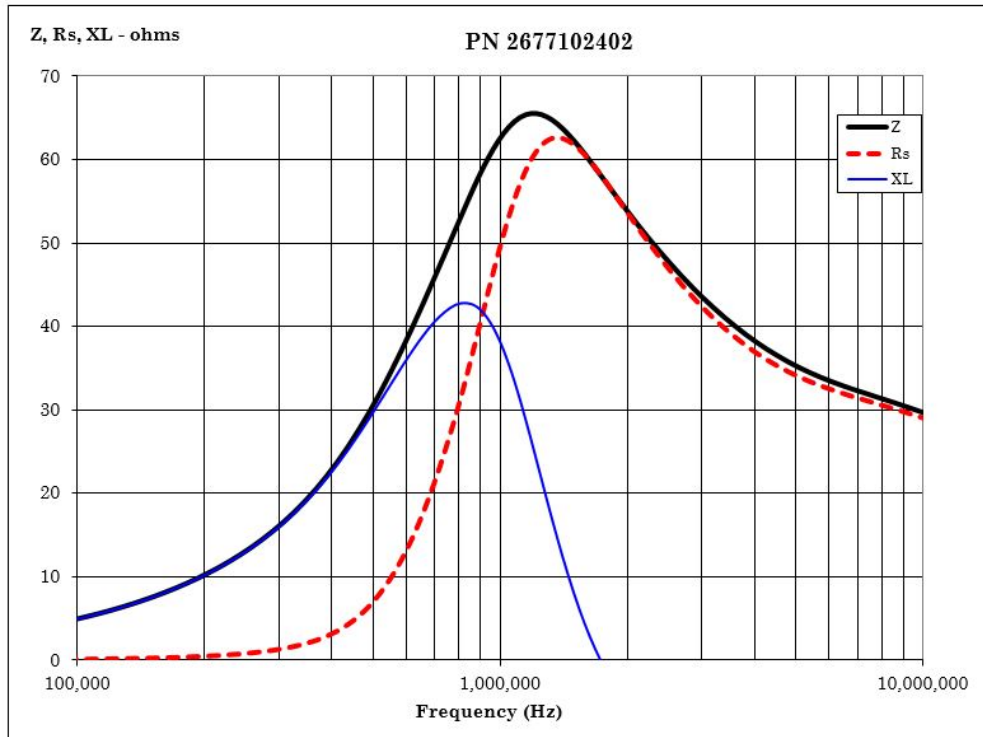

[CSV Download](#)

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com